DL05 I/O SPECIFICATIONS

D0-05DR

Wiring diagram and specifications

D0-05DR Specifications			
AC Power Supply Specifications	Voltage Range	95-240VAC (30VA)	
DC Input Specifications	Number of Input Pts.	8 (sink/source)	
	Number of Commons	2 (isolated)	
	Input Voltage Range	12-24VDC	
	Input Impedance	(X0-X2) 1.8K @ 12-24VDC (X3-X7) 2.8K @ 12-24VDC	
	On Current/ Voltage Level	>5mA/10VDC	
	OFF Current/ Voltage Level	<0.5mA/<2VDC	
	Response Time	X0-X2	X3-X7
	OFF to ON Response	<100µs	<8ms
	ON to OFF Response	<100µs	<8ms
	Fuses	None	
Relay Output Specifications	Number of Output Points	6	
	Number of Commons	2 (isolated)	
	Output Voltage Range	6-240VAC, 47-63Hz 6-27VDC	
	Maximum Voltage	264VAC,30VDC	
	Maximum Current	2A/point 6A/common	
	Maximum Leakage Current	0.1mA @ 246VAC	
	Smallest Recommended Load	5mA @ 5VDC	
	OFF to ON Response	<15ms	
	ON to OFF Response	<10ms	
	Status Indicators	Logic side	
	Fuses	None (external recommended)	

Typical Relay Life (Operations) at Room Temperature		
Voltage and Type of Load	Load Current 1A	2A
24 VDC Resistive	600K	270K
24 VDC Solenoid	150K	60K
110 VAC Resistive	900K	350K
110 VAC Solenoid	350K	150K
220 VAC Resistive	600K	250K
220 VAC Solenoid	200K	100K

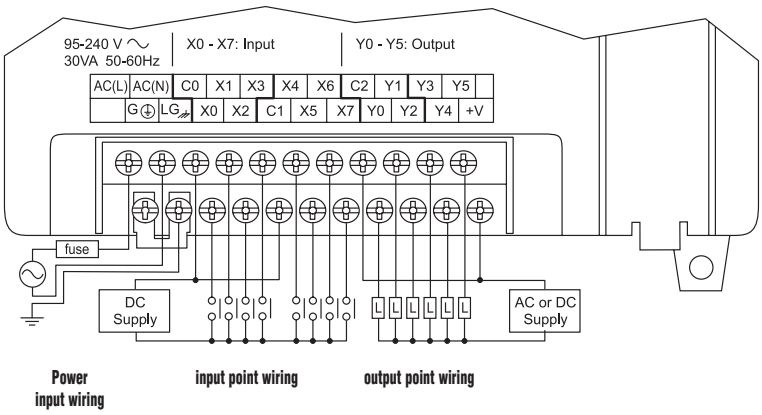
95-240 V ~
30VA 50-60Hz
X0 - X7: Input
Y0 - Y5: Output
AC(L) AC(N) C0 X1 X3 X4 X6 C2 Y1 Y3 Y5
G LG X0 X2 C1 X5 X7 Y0 Y2 Y4 +V
fuse
DC Supply
AC or DC Supply
Power input wiring
input point wiring
output point wiring

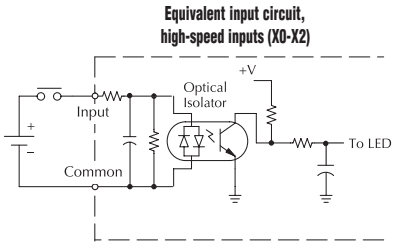

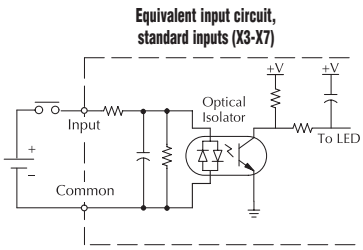



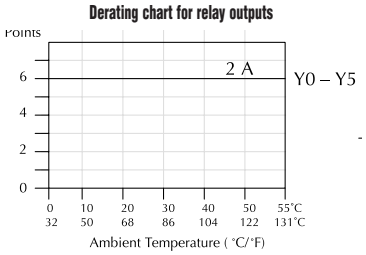

The DL05 & DL06 Family of Products

The DL05 micro PLC family includes eight different models. Each has eight inputs and six outputs in the base unit. The DL05 has one option card slot, which can be used to expand the I/O count, provide additional communications capability or add a real-time clock and battery back-up.

The larger DL06 micro PLC family has 20 inputs and 16 outputs in the base unit. The DL06 has four option card slots which can be used to add I/O or provide additional communications options.

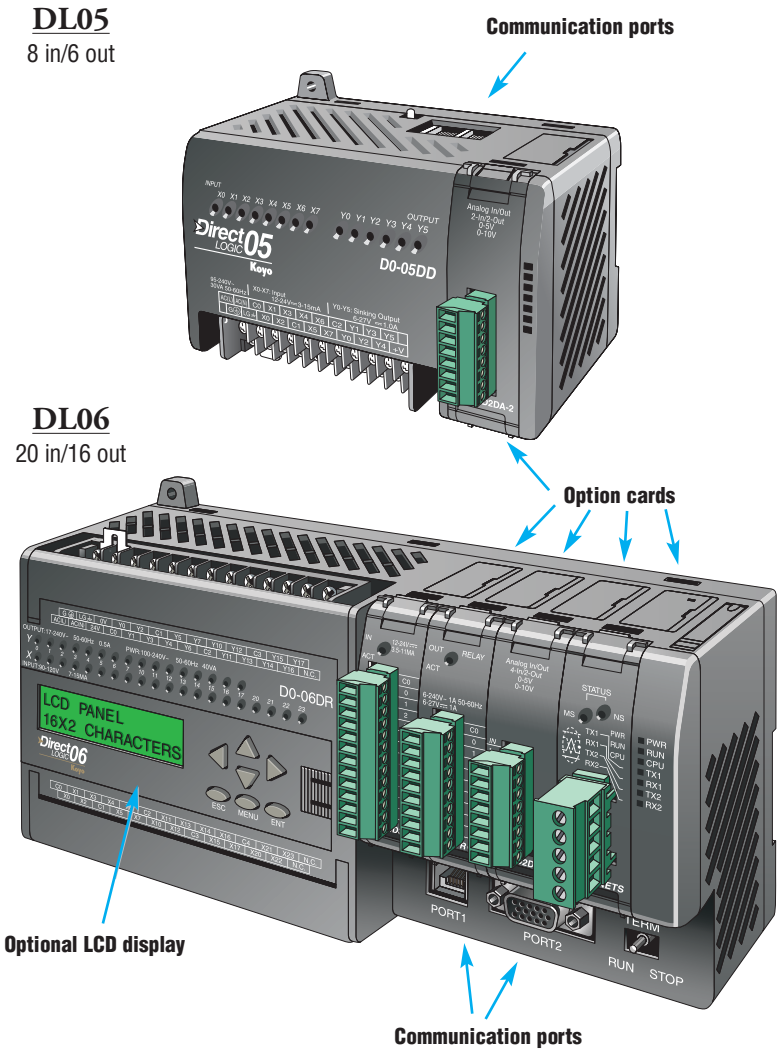

Instruction sets

The DL05 CPU offers PID capability, high-speed counting, and the same powerful instruction set as our popular DL250 CPU. All DL05 PLCs have two built-in RS-232C communications ports that can be used for programming, operator interface, networking, etc.

The DL06 CPU offers PID capability, floating point number handling, and an instruction set very similar to our new D2-260 CPU. Many powerful new instructions are included. All DL06 PLCs have two built-in communications ports that can be used for programming, operator interface, networking, etc. One of the DL06 ports is a multi-function port capable of RS232C, RS422, or RS485 communications.

Power options

The DL05 and DL06 families have AC and DC power options. They are also offered with a variety of I/O options. You can explore the Quick Selection Guide on the next page to choose the right PLC for your application.

High-speed inputs and outputs

Units with DC inputs have selectable high-speed input features on three input points (DL05) or four input points (DL06). Units with DC outputs can use the first two outputs as a single bi-directional pulse output. Detailed specifications for each model appear later in this section.

General Specifications	AC Powered	DC Powered
Power	110/220VAC (+ 10%, -15%), 50-60Hz	12/24VDC
Input Voltage Range	95-240VAC	12-24VDC
Maximum Power	30VA (DL05) 40VA (DL06)	20W
Maximum Inrush Current	13A, 1ms (240VAC)	10A < 1ms
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	
Ambient Operating Temperature	32°F to 131°F (0°C to 55°C)	
Ambient Humidity	5% - 95% relative humidity (non-condensing)	
Vibration Resistance	MIL STD 810C, Method 514.2	
Shock Resistance	MIL STD 810C, Method 516.2	
Noise Immunity	NEMA (ICS3-304)	
Atmosphere	No corrosive gases	

FEATURES AT A GLANCE

The DL05 and DL06 micro PLCs are complete self-contained systems. The CPU, power supply, and I/O are all included inside the same housing. Option modules are available to expand the capability of each PLC family for more demanding applications. The standard features of these PLCs are extraordinary and compare favorably with larger and more expensive PLCs.

The specification tables to the right are meant for quick reference only. Detailed specifications and wiring information for each model of the DL05 and DL06 PLCs begin on page 2–33.

Program capacity

Most boolean ladder instructions require a single word of program memory. Other instructions, such as timers, counters, etc., require two or more words. Data is stored in V-memory in 16-bit registers.

Performance

The performance characteristics shown in the tables represent the amount of time required to read the inputs, solve the Relay Ladder Logic program and update the outputs.

Instructions

A complete list of instructions is available at the end of this section.

Communications

The DL05 and DL06 offer powerful communication features normally found only on more expensive PLCs.

Special features

The DC input and DC output PLCs offer high-speed counting or pulse output. Option card slots allow for discrete I/O expansion, analog I/O, or additional communication options.

DL05 CPU Specifications

System capacity

Total memory available (words)	6K
Ladder memory (words)	2,048
V-memory (words)	4,096
User V-memory	3,968
Non-volatile user V-memory	128
Battery backup	Yes[1]
Total built-in I/O	14
Inputs	8
Outputs	6
I/O expansion	Yes[1]

Performance

Contact execution (Boolean)	0.7µs
Typical scan (1K Boolean)[2]	1.5-3ms.

Instructions and diagnostics

RLL ladder style	Yes
RLLPLUS/flowchart style (Stages)	Yes/256
Run-time editing	Yes
Scan	Variable/fixed
Number of Instructions	133
Types of Instructions:	
Control relays	512
Timers	128
Counters	128
Immediate I/O	Yes
Subroutines	Yes
For/next loops	Yes
Timed interrupt	Yes
Integer math	Yes
Floating-point math	No
PID	Yes
Drum sequencers	Yes
Bit of word	Yes
ASCII print	Yes
Real-time clock/calendar	Yes[1]
Internal diagnostics	Yes
Password security	Yes
System and user error log	No

Communications

Built-in ports	Two RS-232C
Protocols supported:	
K-sequence (proprietary protocol)	Yes
DirectNet master/slave	Yes
MODBUS RTU master/slave	Yes
ASCII out	Yes
Baud rate	
Port 1	9,600 baud (fixed)
Port 2	selectable 300-38,400 baud (default 9,600)

Specialty Features

Filtered inputs	Yes[3]
Interrupt input	Yes[3]
High speed counter	Yes, 5kHz[3]
Pulse output	Yes, 7kHz[3]
Pulse catch input	Yes[3]

1- These features are available with use of certain option cards. Option card specifications are located later in this section.

2- Our 1K program includes contacts, coils, and scan overhead. If you compare our products to others, make sure you include their scan overhead.

3- Input features only available on units with DC inputs and output features only available on units with DC outputs.

DL06 CPU Specifications

System capacity

Total memory available (words)	14.8K
Ladder memory (words)	7680
V-memory (words)	7616
User V-memory	7488
Non-volatile user V-memory	128
Built-in battery backup	Yes
Total I/O	36
Inputs	20
Outputs	16
I/O expansion	Yes[1]

Performance

Contact execution (Boolean)	0.6µs
Typical scan (1K Boolean)[2]	1-2ms.

Instructions and diagnostics

RLL ladder style	Yes
RLLPLUS/flowchart style (Stages)	Yes/1024
Run-time editing	Yes
Scan	Variable/fixed
Number of Instructions	229
Types of Instructions:	
Control relays	1024
Timers	256
Counters	128
Immediate I/O	Yes
Subroutines	Yes
For/next loops	Yes
Table functions	Yes
Timed interrupt	Yes
Integer math	Yes
Trigonometric functions	Yes
Floating-point math	Yes
PID	Yes
Drum sequencers	Yes
Bit of word	Yes
Number type conversion	Yes
ASCII in, out, print	Yes
LCD instruction	Yes
Real-time clock/calendar	Yes
Internal diagnostics	Yes
Password security	Yes
System and user error log	No

Communications

Built-in ports:	One RS-232C
	One multi-function RS232C/RS422/RS485
Protocols supported:	
K-sequence (proprietary protocol)	Yes
DirectNet master/slave	Yes
MODBUS RTU master/slave	Yes
ASCII in/out	Yes
Baud rate	
Port 1	9,600 baud (fixed)
Port 2	selectable 300-38,400 baud (default 9,600)

Specialty Features

Filtered inputs	Yes[3]
Interrupt input	Yes[3]
High speed counter	Yes, 7kHz[3]
Pulse output	Yes, 10kHz[3]
Pulse catch input	Yes[3]

1- These features are available with use of certain option cards. Option card specifications are located later in this section.

2- Our 1K program includes contacts, coils, and scan overhead. If you compare our products to others, make sure you include their scan overhead.

3- Input features only available on units with DC inputs and output features only available on units with DC outputs.

Features at a Glance

*Direct*SOFT32 software

The DL05 and DL06 PLCs use the same familiar *Direct*SOFT32 programming software that our larger PLCs use. Special low-priced software versions are available for the micro PLCs, but if you already own the complete programming package, that will work too (version 4.0 or later).

The PC-PGM-105 software is sufficient to program the DL05 PLC and the DL105 PLC (which is featured in the next section). Version 2.4 is required, but we always recommend the latest version for the most robust features. The DL06 PLC requires Version 4.0 of *Direct*SOFT32, and comes bundled with the DL05 and DL105 software in the PC-PGM-BRICK package.

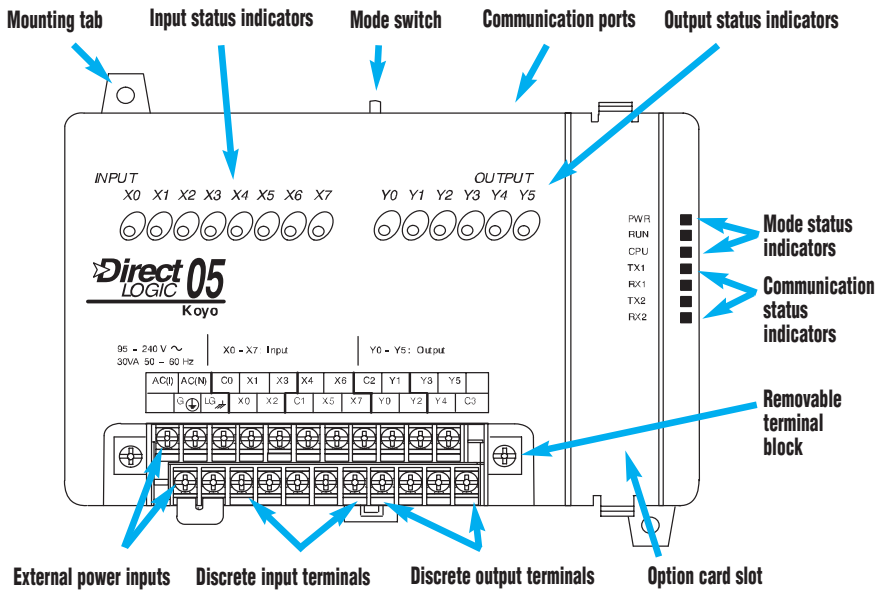

Hardware features diagrams

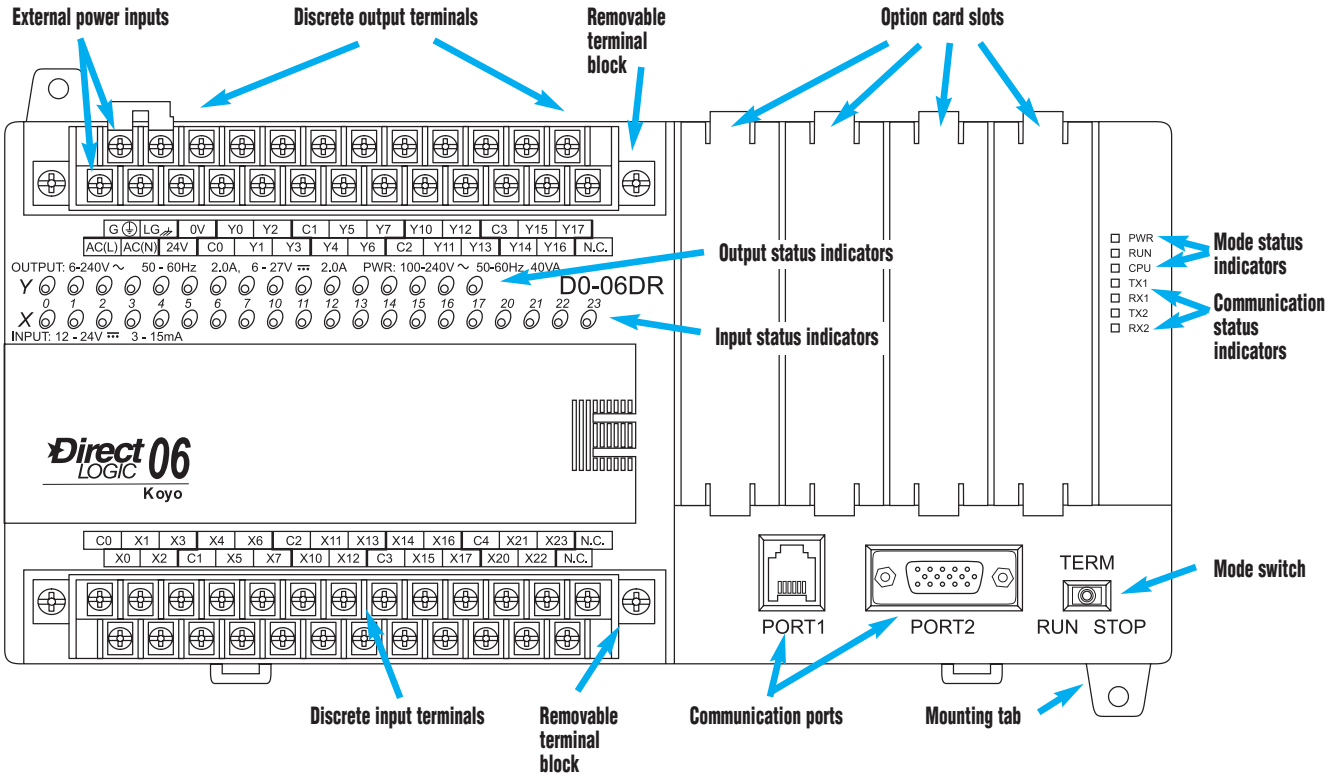

Product Dimensions and Installation

It is important to understand the installation requirements for your DL05 or DL06 system. Your knowledge of these requirements will help ensure that your system operates within its environmental and electrical limits.

Plan for safety

This desk reference should never be used as a replacement for the user manual. You can purchase, download free, or view online the user manuals for these products. The D0-USER-M is the publication for the DL05 PLCs, and the D0-06USER-M is the publication for the DL06 PLCs. The D0-OPTIONS-M is the user manual for the option cards. These user manuals contain important safety information that must be followed. The system installation should comply with all appropriate electrical codes and standards.

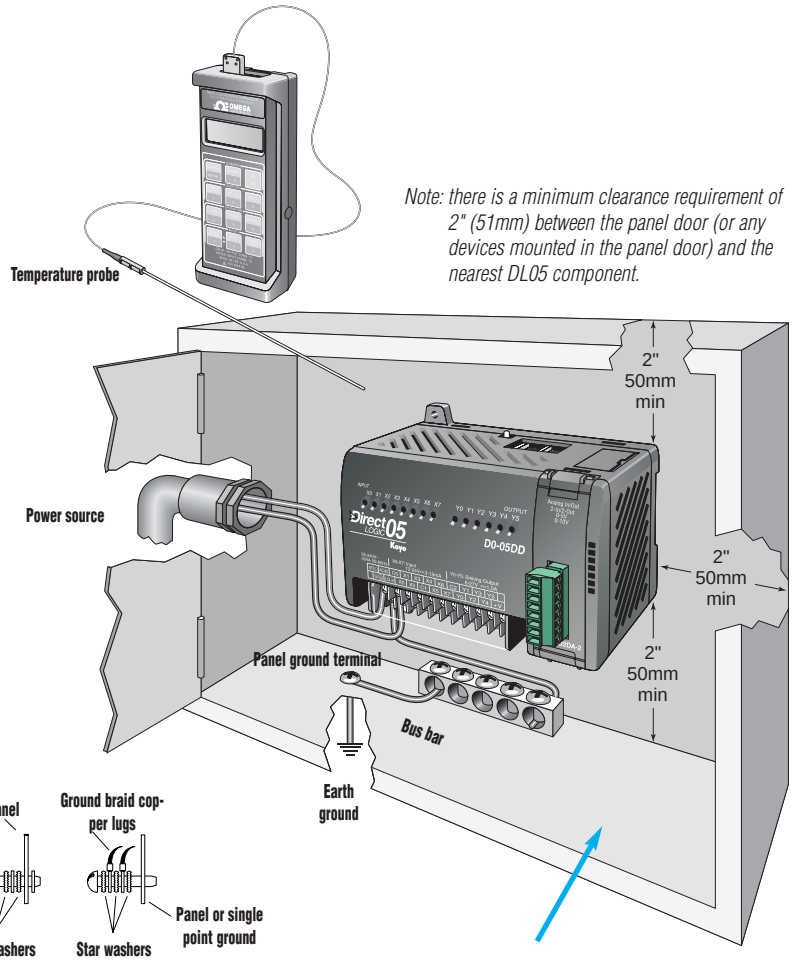

Note: there is a minimum clearance requirement of 2" (51mm) between the panel door (or any devices mounted in the panel door) and the nearest DL05 component.

See the enclosure section of this desk reference to find an enclosure that fits your application.

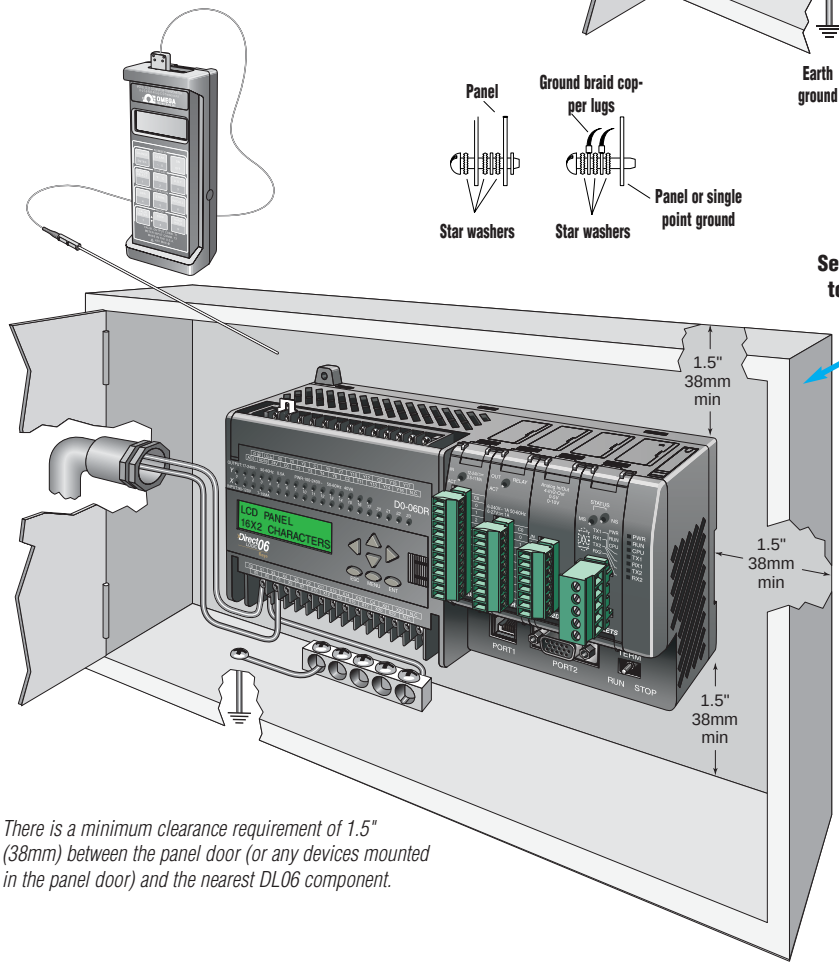

Note: There is a minimum clearance requirement of 1.5" (38mm) between the panel door (or any devices mounted in the panel door) and the nearest DL06 component.

Environmental Specifications for DL05 and DL06	
Storage Temperature	-4º F-158ºF (-20ºC to 70ºC)
Ambient Operating Temperature	32ºF-131ºF (0º to 55ºC)
Ambient Humidity	5 to 95% relative humidity (non-condensing)
Vibration Resistance	MIL STD 810C Method 514.2
Shock Resistance	MIL STD 810C Method 516.2
Noise Immunity	NEMA (ICS3-304)
Atmosphere	No corrosive gases

Product Dimensions and Installation

Unit dimensions and mounting orientation

DL05 and DL06 PLCs must be mounted properly to ensure ample airflow for cooling purposes. It is important to follow the unit orientation requirements and to verify that the PLC's dimensions are compatible with your application. Notice particularly the grounding requirements and the recommended cabinet clearances.

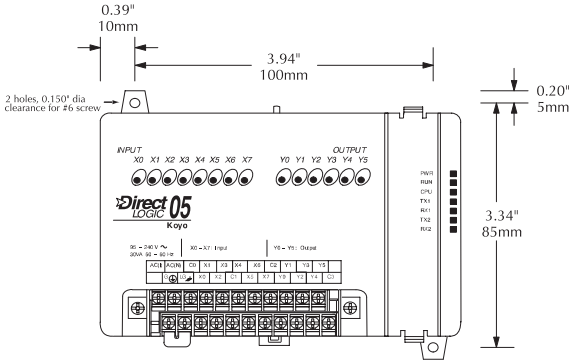



Mounting orientation

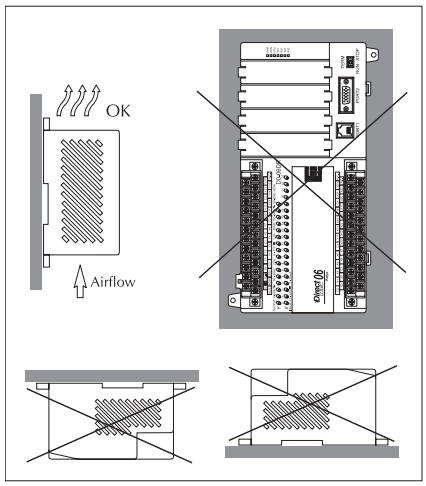

Mounting orientation